

RIBAG



SCOPY

/  
essence of light





### Die Kunst der Inszenierung

In einer Welt, in der sich die Komplexität der Raumgestaltung ständig weiterentwickelt, gewinnen anpassungsfähige und zeitlose Beleuchtungslösungen immer mehr an Bedeutung. Doch wir streben nicht nur nach funktionalen Lösungen – unser Ziel ist es, Räume zu schaffen, die unsere Sinne ansprechen und eine einzigartige Atmosphäre erzeugen.

Mit der neuen Kollektion SCOPY kreieren Sie lebendige Räume mit spannenden Licht- und Schattenkontrasten. Durch den Einsatz des miniaturisierten Zoom-Spots und der eleganten Pendelleuchte eröffnen sich völlig neue Möglichkeiten für die professionelle Lichtgestaltung. Die flexible Anordnung der Lichtkegel ermöglicht es Ihnen, Flächen und Objekte auf einzigartige Weise zu beleuchten und Räume mit beeindruckender Tiefenwirkung zu inszenieren.

Entdecken Sie eine neue Ära des Lichts.

### The art of staging

In a world where the complexity of interior design is constantly evolving, adaptable and timeless lighting solutions are becoming increasingly important. But we don't just strive for functional solutions—our goal is to create spaces, that appeal to our senses and create a unique atmosphere.

With the new SCOPY collection, you can create lively rooms with exciting contrasts of light and shadow contrasts. The use of the miniaturised Zoom spotlight and the elegant pendant lamp opens up completely new possibilities for professional lighting design. The flexible arrangement of the light cones enables you to illuminate surfaces and objects in a unique way and to stage rooms with an impressive depth effect.

Discover a new era of light.

  
**Andreas Richner**  
Innovator

# SCOPY

## Variantenreiche Inszenierung

Erleben Sie exzellente Lichtwirkung und äusserst flexible Gestaltungsmöglichkeiten mit der neuen Kollektion SCOPY. Spannende Dramaturgien und stimmungsvolle Raumatmosphären waren nie einfacher zu planen. Die miniaturisierten, fokussierbaren Spots und die graziösen Pendelleuchten können mit einfachstem Plug & Play System in die bestehenden Lichtsysteme MILUM und RAYM integriert werden und eröffnen vielseitige Inszenierungsmöglichkeiten mit präziser Lichtführung und hoher Brillanz.

## Versatile staging

Experience excellent lighting effects and extremely flexible design options with the new SCOPY collection. Exciting dramaturgies and atmospheric room ambiances have never been easier to plan. The miniaturised, focusable spots and the graceful pendant lamps can be integrated into the existing MILUM and RAYM lighting systems with the simplest plug-and-play system and open up various staging options with precise light distribution and high brilliance.

[ribag.com/scopy](https://ribag.com/scopy)





### SCOPY Spot

Mit seinem flexibel fokussierbaren Lichtkegel von 20°–70° löst der SCOPY Spot verschiedenste Beleuchtungsaufgaben mit Leichtigkeit. Der 90° schwenkbare und 360° drehbare Spot ist mit 2700K, 3000K wie auch als Tunable White Variante in jeweils 5 Gehäusefarben erhältlich.

With its flexibly focusable light cone of 20°–70° the SCOPY spot solves the most diverse lighting tasks with ease. The spot can be swivelled 90° and rotated 360° and is available in 2700K, 3000K and as a Tunable White version in 5 housing colours.



### Plug and play

Die als Stecksystem konstruierten Leuchten lassen sich auf einfache Weise werkzeuglos in alle Anwendungen integrieren. Die verfügbaren Steckplätze können dabei wahlweise mit Spots oder mit Pendelleuchten bestückt werden.

The lamps, designed with a plug-in system, can be easily integrated into all applications in a tool-free manner. The available slots can be equipped with spots or pendant lamps.




Die SCOPY Spots und Pendelleuchten sind in den folgenden Ausführungen verfügbar: als 1er- und 2er Anwendung für den randlosen Einbau, als 2er Anwendung für den Einbau mit dem RAYM Montagering und -rahmen, sowie als 1er, 3er und 5er Modul für die Integration in die MILUM Tragschiene. Des Weiteren sind eine 4er und 7er Tragschiene mit vorkonfigurierten Schaltkreisen zur separaten Steuerung von Spots und Pendelleuchten verfügbar.

SCOPY spots and pendant lamps are available in the following versions: as a single and double application for rimless installation, as a double application for installation with the RAYM mounting ring and frame, as modules of 1, 3 and 5 for integration into the MILUM mounting rail and as mounting rail of 4 and 7 with preconfigured circuits for separate control of spots and pendant lamps.






**SCOPY Spot mit 1er Einbaugehäuse**  
SCOPY spot with single installation housing

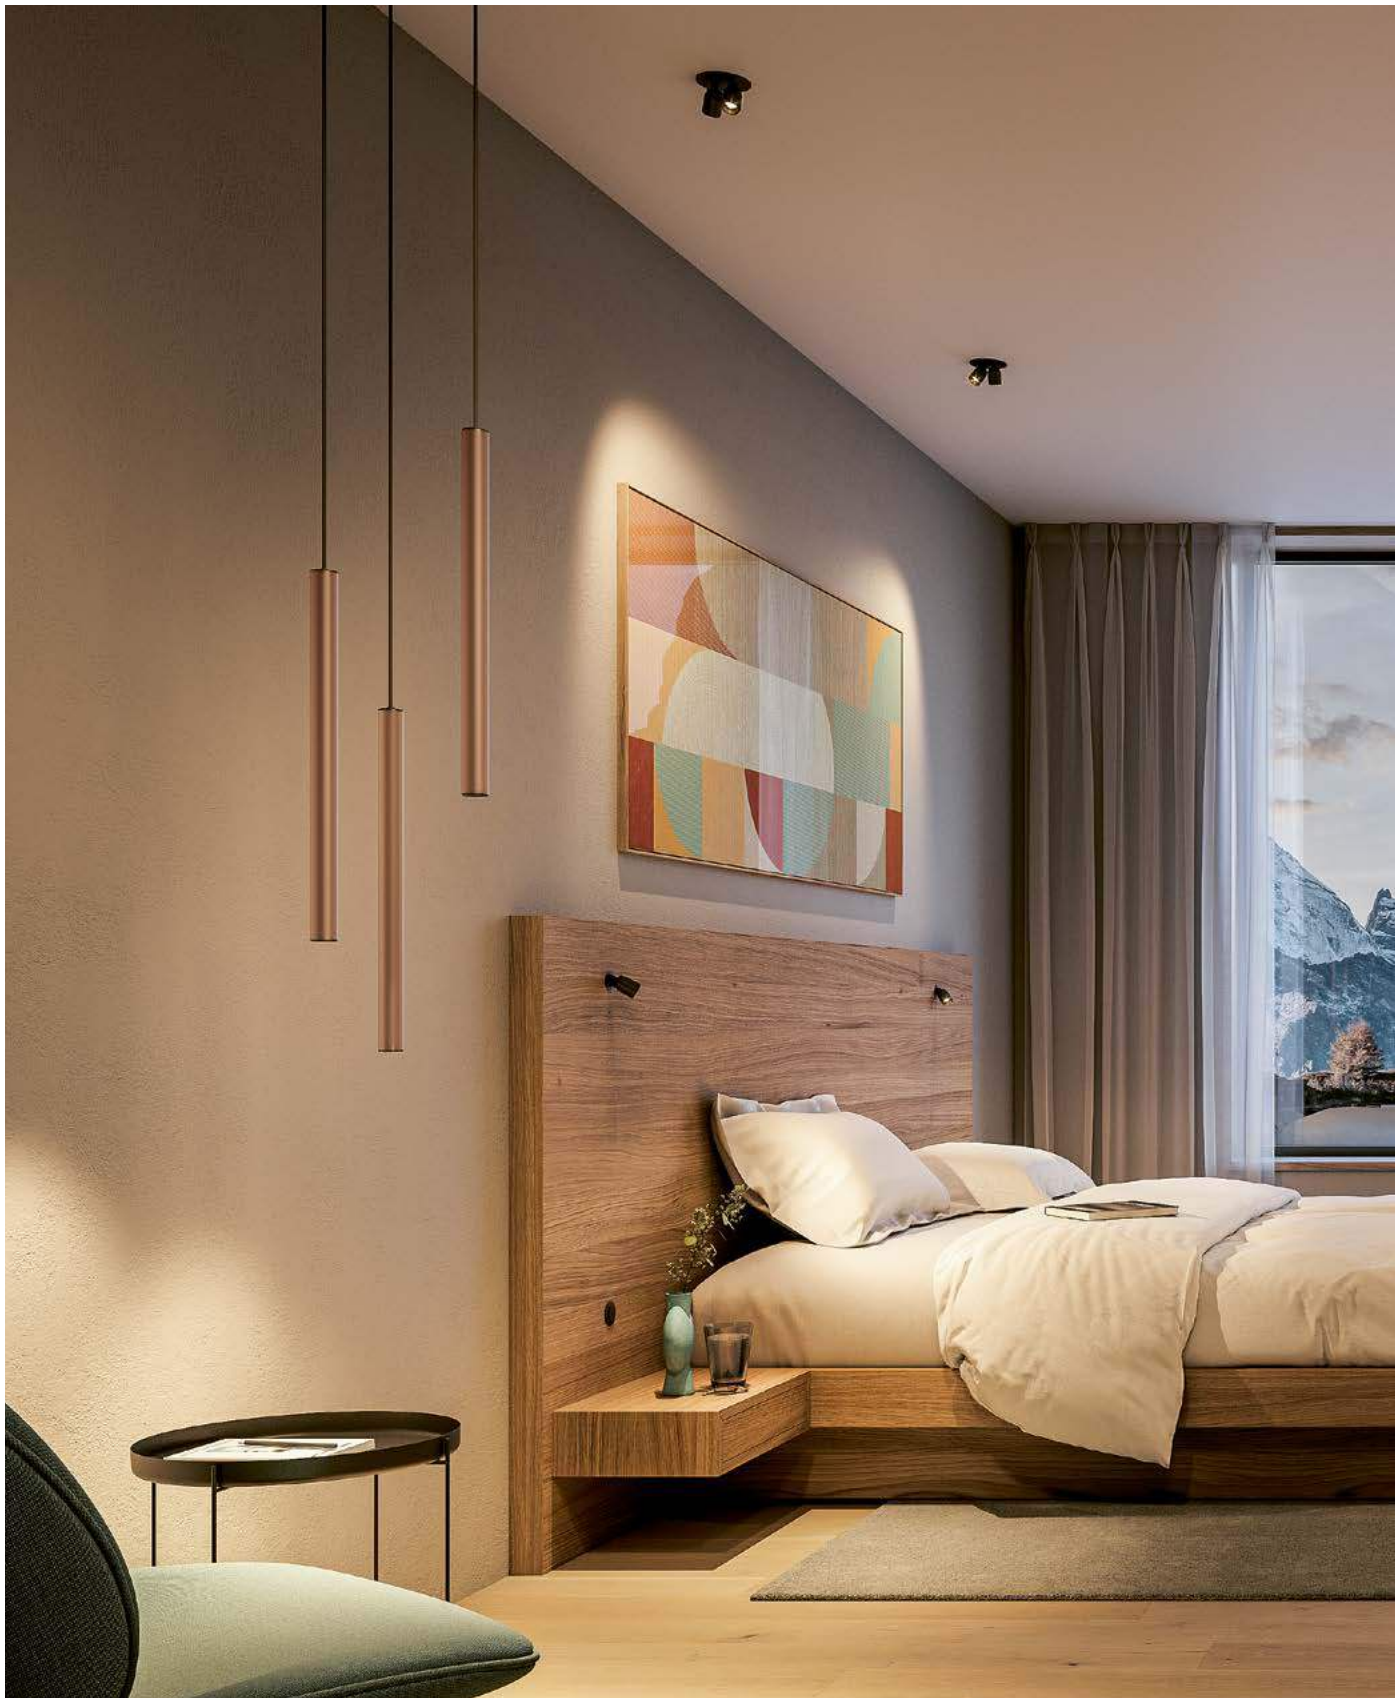

**SCOPY Spots mit 1er Einbaugehäuse, mit Einsatz für RAYM Montagering und Pendelleuchten**  
SCOPY spots with single installation housing, with insert for RAYM mounting ring and pendant lamps



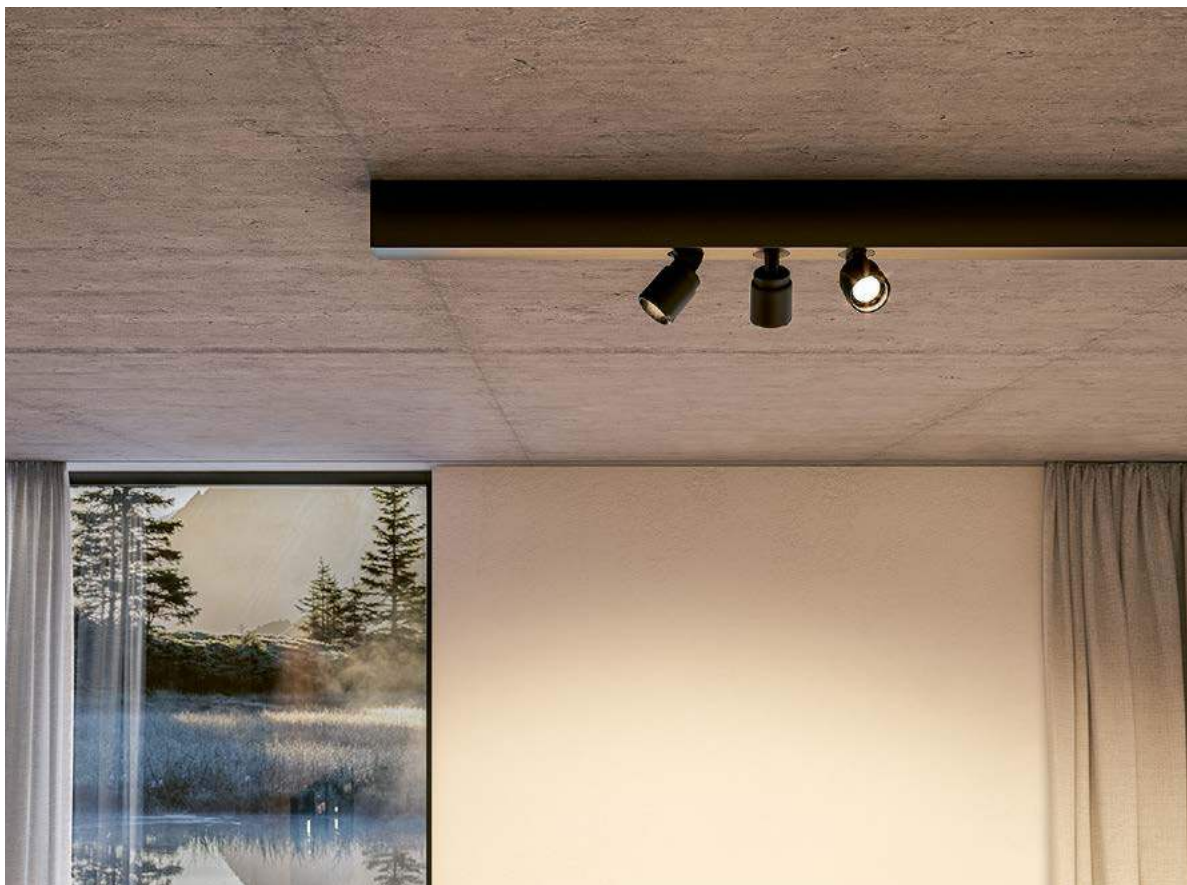

**SCOPY Spots mit 3er Modul für MILUM Tragschiene**  
 SCOPY spots with module of 3 for MILUM mounting rail

**SCOPY Spots mit 3er Modul und Pendelleuchten  
 mit 1er Modul für MILUM Tragschiene**  
 SCOPY spots with module of 3 and pendant lamps  
 with single module for MILUM mounting rail




**SCOPY** Spots mit 3er Modul für **MILUM** Tragschiene  
und mit 1er Einbaugehäuse  
**SCOPY** spots in module of 3 for **MILUM** mounting  
rail and with single installation housing








**SCOPY Spots mit 1er Einbaugehäuse**  
SCOPY spots with single installation housing

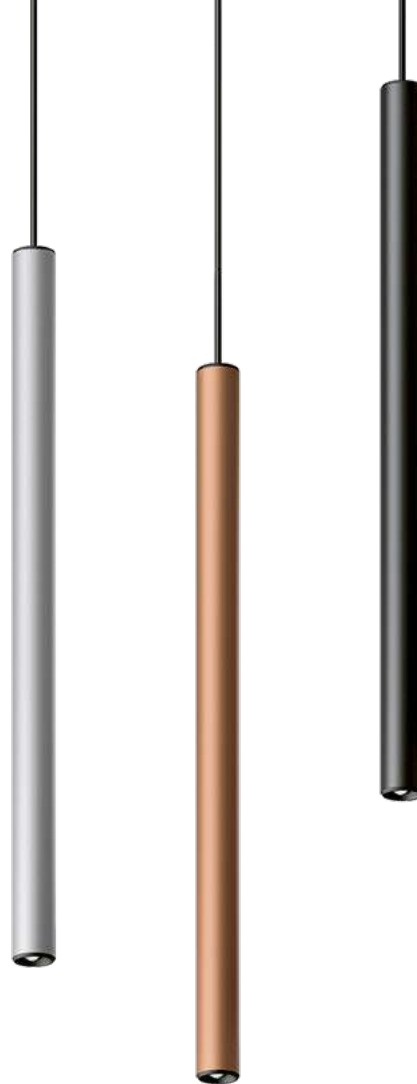

Die grazile SCOPY Pendelleuchte ist mit ihrem 70° Ausstrahlwinkel die perfekte Ergänzung zum flexiblen SCOPY Spot, zur Inszenierung von Theken, Tischen und Bars. Erhältlich in 5 Gehäusefarben, als Single Colour oder Tunable White Variante.

The graceful SCOPY pendant lamp with its 70° beam angle is the perfect complement to the flexible SCOPY spot, for staging counters, tables and bars. Available in 5 housing colours, as Single Colour or Tunable White variant.

**Planungshinweise und Kombinationsmöglichkeiten mit MILUM Lichtsystem:**  
**Planning guide and combination options with MILUM lighting system:**

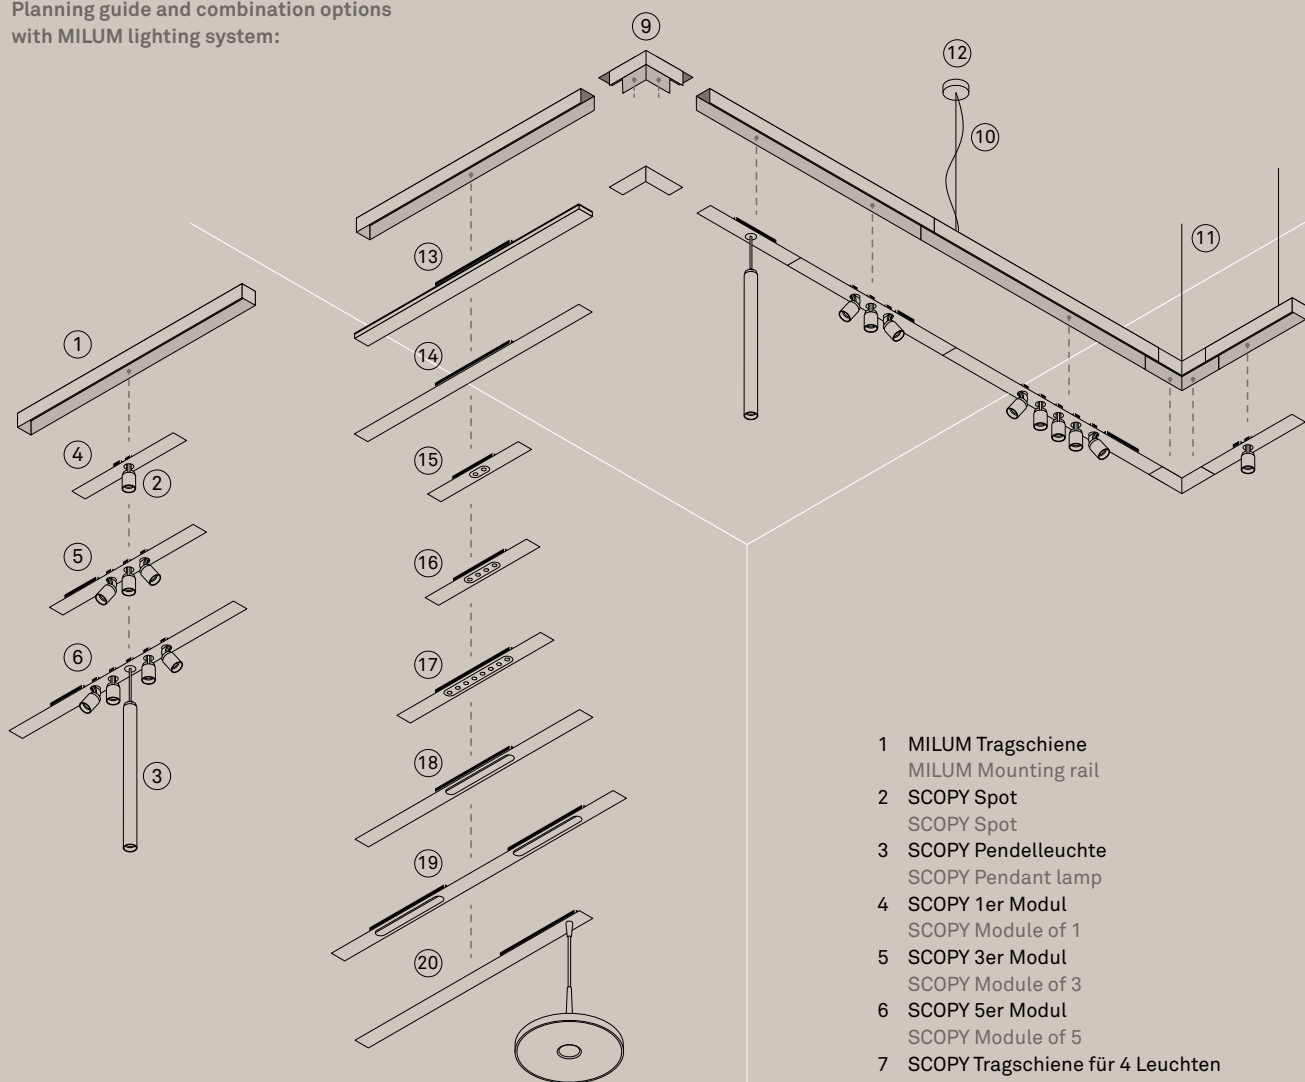

- 1 MILUM Tragschiene  
MILUM Mounting rail
- 2 SCOPY Spot  
SCOPY Spot
- 3 SCOPY Pendelleuchte  
SCOPY Pendant lamp
- 4 SCOPY 1er Modul  
SCOPY Module of 1
- 5 SCOPY 3er Modul  
SCOPY Module of 3
- 6 SCOPY 5er Modul  
SCOPY Module of 5
- 7 SCOPY Tragschiene fr 4 Leuchten  
SCOPY Mounting rail for 4 lamps
- 8 SCOPY Tragschiene fr 7 Leuchten  
SCOPY Mounting rail for 7 lamps
- 9 MILUM Eckverbinder  
MILUM Corner connector
- 10 Pendel-Set (inkl. Anschlusskabel)  
Pendant set (incl. connecting cable)
- 11 Stahlseilabhngung  
Steel cable suspension
- 12 Baldachin  
Canopy
- 13 MILUM LED-Modul opal rundumstrahlend  
MILUM LED module opal omnidirectional
- 14 MILUM LED-Modul opal direktstrahlend  
MILUM LED module opal direct beam
- 15 MILUM Downlight 2er LED-Module  
MILUM Downlight LED modules of 2
- 16 MILUM Downlight 4er LED-Module  
MILUM Downlight LED modules of 4
- 17 MILUM Downlight 8er LED-Module  
MILUM Downlight LED modules of 8
- 18 MILUM Wallwasher 8er LED-Module  
MILUM Wallwasher LED modules of 8
- 19 MILUM Wallwasher 2 x 8er LED-Module  
MILUM Wallwasher LED modules of 2 x 8
- 20 MILUM Pendelleuchtenelement  
MILUM Pendant lamp element


**Planungshinweise Tragschienen mit Pendelleuchten und Spots**  
Planning guide mounting rail with pendant lamps and spots

Die Leuchten der 4er und 7er Tragschiene sind mit den vorkonfigurierten Schaltkreisen separat steuerbar.  
The lamps of the mounting rail for 4 and 7 units can be controlled separately with the preconfigured circuits.


- ⑦ SCOPY Tragschiene  
für 4 Leuchten  
SCOPY mounting rail  
for 4 lamps



- ⑧ SCOPY Tragschiene  
für 7 Leuchten  
SCOPY mounting rail  
for 7 lamps

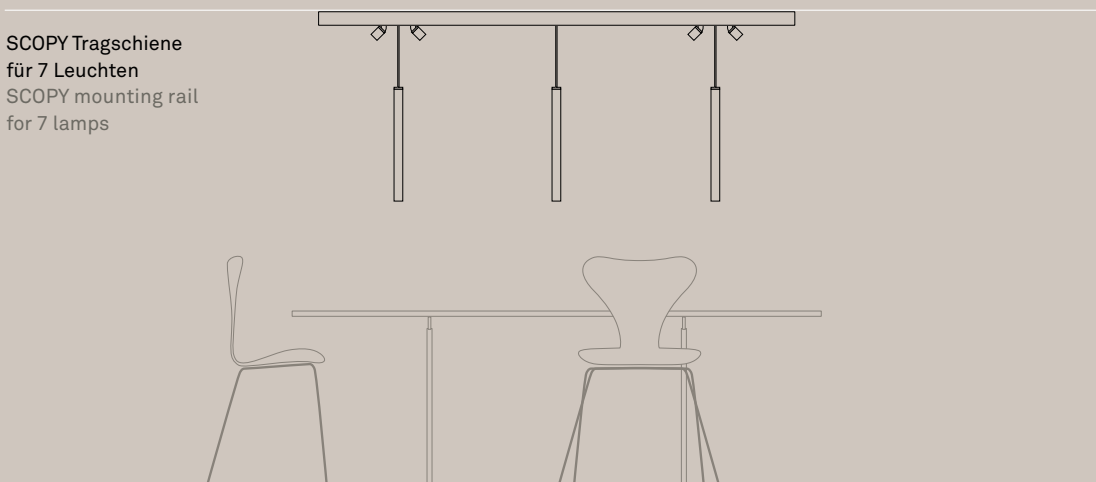

- Kombination von  
2 SCOPY Tragschienen  
für 8 Leuchten  
Combination of 2  
SCOPY mounting rails  
for 8 lamps

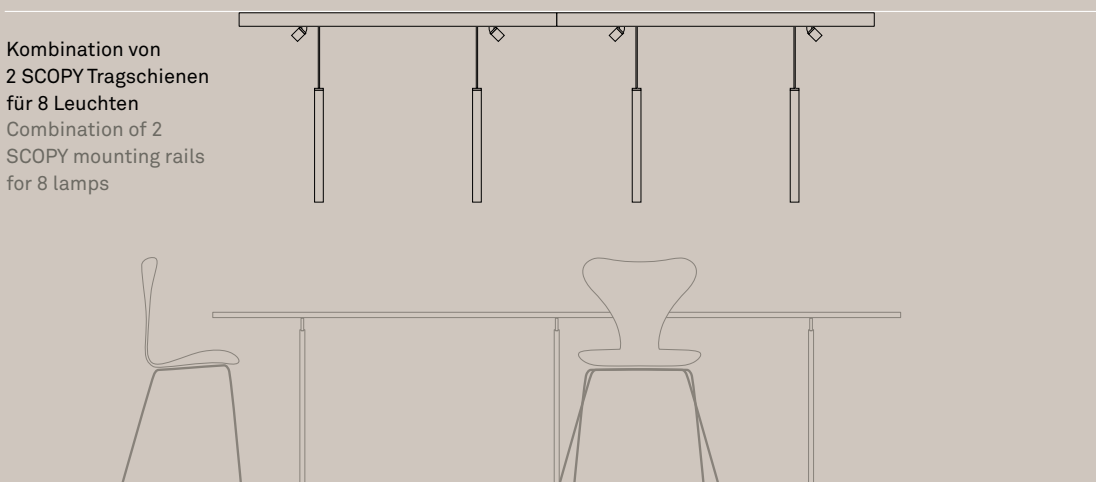

### Planungshinweise:

Sämtliches Zubehör separat bestellen

### Planning guide:

Order all accessories separately



### SCOPY

Spot und Pendelleuchte frei platzier- und kombinierbar (Plug&Play)

Spot and pendant lamp can be flexibly placed and combined (Plug&Play)


### Montagevarianten – randlos

Mounting options – rimless

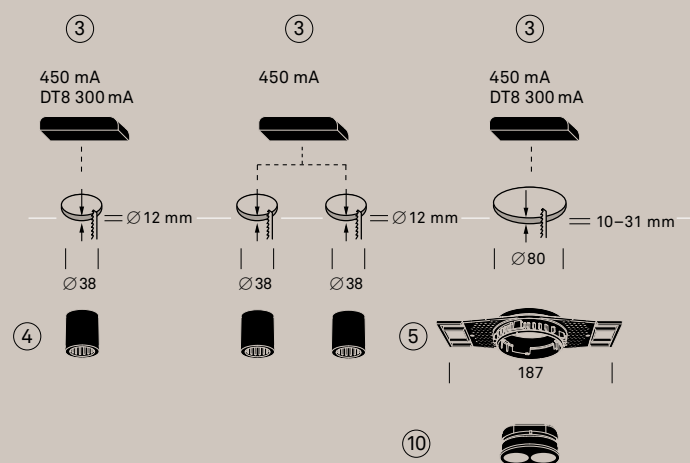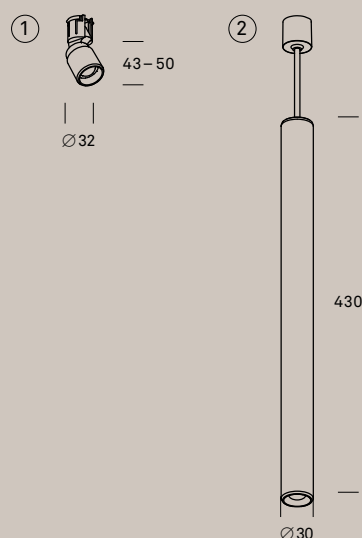

### Montagevarianten – mit RAYM Montagering/-rahmen


Mounting options – with RAYM mounting ring/frame

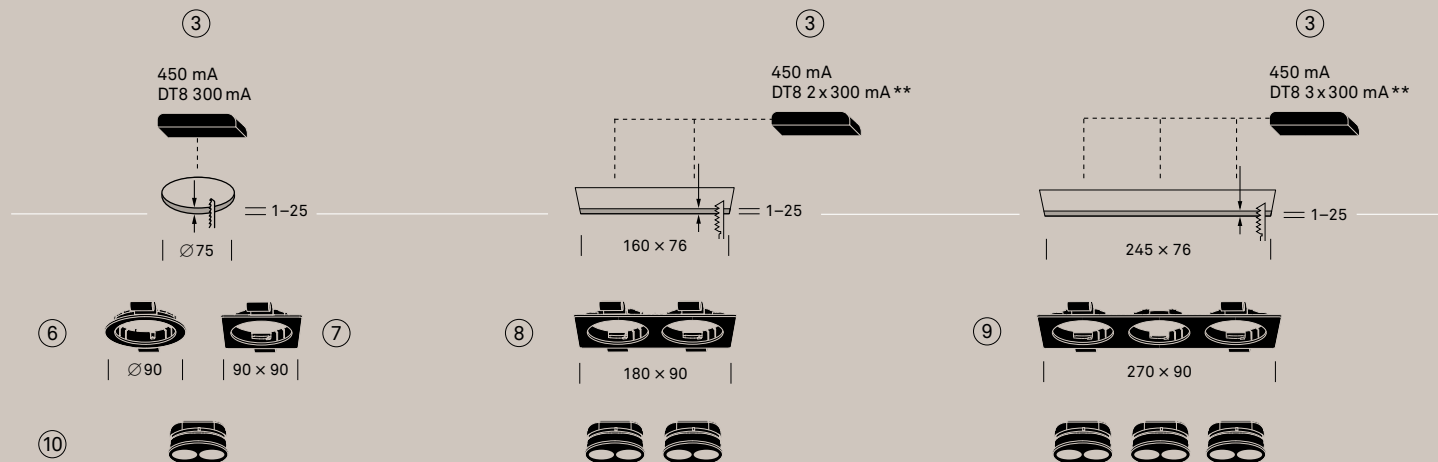

\*\* DT8: pro 2er Einsatz ist ein Betriebsgerät 300 mA notwendig  
DT8: per insert of 2 one control gear 300 mA is needed

## Montagevarianten – mit Tragschienen

### Mounting options – with mounting rails

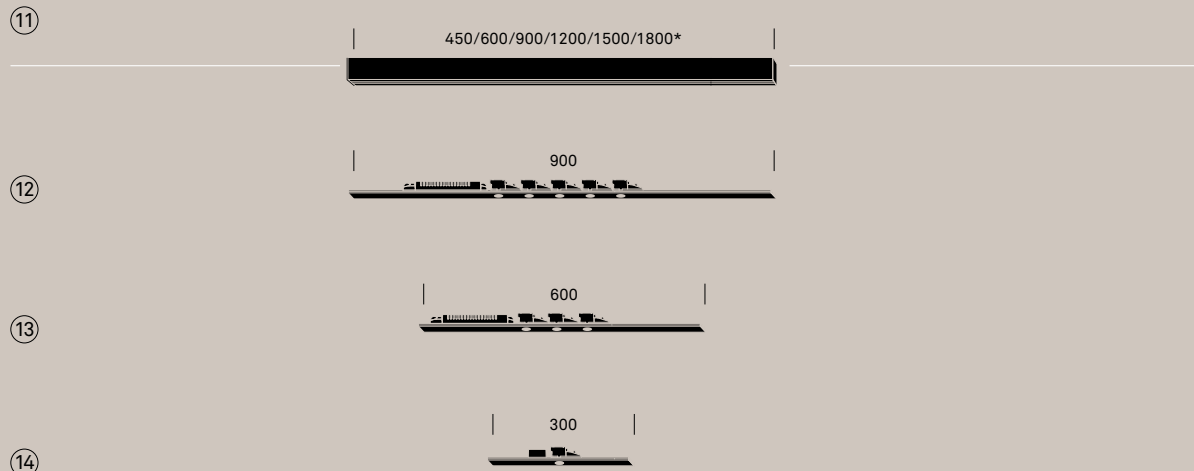


#### Tragschienen für 4 oder 7 Leuchten:

Spots (A) und Pendelleuchten (B) können gemäss angegebenen Schaltkreisen separat angesteuert werden.

Mounting rails for 4 or 7 lamps:

Spots (A) and pendant lamps (B) can be controlled separately according to indicated circuits.


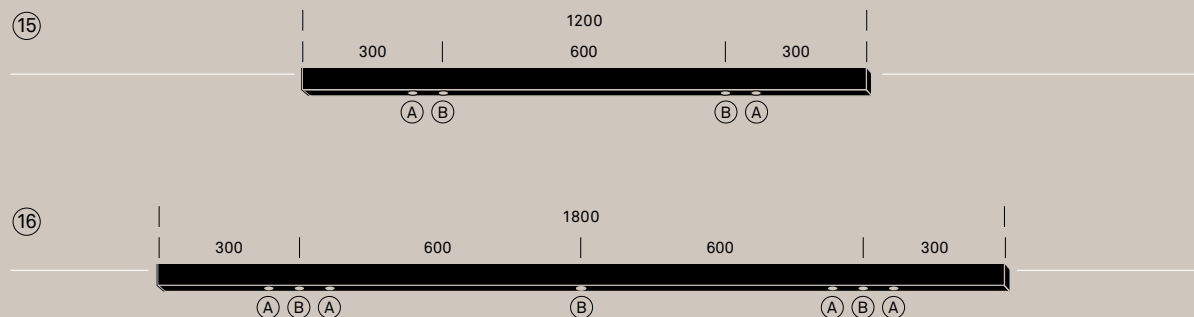


- 1 SCOPY Spot  
SCOPY Spot
- 2 SCOPY Pendelleuchte  
SCOPY Pendant lamp
- 3 Betriebsgerät  
Control gear
- 4 SCOPY 1er Einbaugehäuse  
SCOPY Single installation housing
- 5 Montagerring für randlosen Einbau  
Mounting ring for flush installation
- 6 RAYM Montagerring  
RAYM Mounting ring

- 7 RAYM Montagerahmen  
RAYM Mounting frame
- 8 RAYM Montagerahmen 2-fach  
RAYM Mounting frame 2-gang
- 9 RAYM Montagerahmen 3-fach  
RAYM Mounting frame 3-gang
- 10 2er SCOPY Einsatz für RAYM  
Montagerring/-rahmen  
SCOPY Insert for RAYM  
mounting ring/frame for 2
- 11 MILUM Tragschiene  
MILUM Mounting rail

- 12 SCOPY 5er Modul  
SCOPY Module of 5
- 13 SCOPY 3er Modul  
SCOPY Module of 3
- 14 SCOPY 1er Modul  
SCOPY Module of 1
- 15 SCOPY Tragschiene für 4 Leuchten  
SCOPY Mounting rail for 4 lamps
- 16 SCOPY Tragschiene für 7 Leuchten  
SCOPY Mounting rail for 7 lamps

\* Länge ohne Endplatten  
Length without end plates

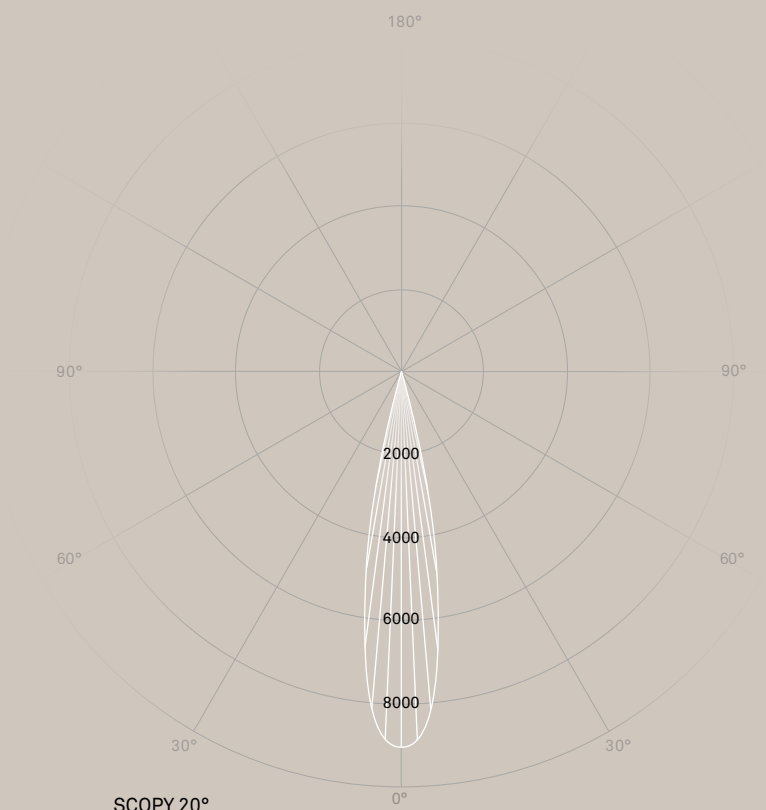

SCOPY 20°

C90 / C270


C0 / C180

cd / 1000 lm



## Spots



|                                               |                                                                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Leuchtengehäuse<br>Lamp housing               | Polycarbonat V0<br>Polycarbonate V0                                                                                                                                            |
| Farben<br>Colours                             | schwarz RAL 9005 / weiss RAL 9003 / grau RAL 9006 / rosé gold / sand gold<br>black RAL 9005 / white RAL 9003 / grey RAL 9006 / rose gold / sand gold                           |
| Farbtemperaturen<br>Colour temperatures       | 2700 / 3000 / 2200–5000 K                                                                                                                                                      |
| Leuchtenlichtstrom<br>Luminaire luminous flux | 87–205 lm                                                                                                                                                                      |
| Anschlussleistung<br>Connected load           | 4 W                                                                                                                                                                            |
| Nutzlebensdauer LED<br>Service life LED       | 50'000 h L90 B10 (Ta 25 °C)                                                                                                                                                    |
| Betriebsgerät<br>Control gear                 | EVG 230 V / 50 Hz Konstantstrom 450 mA / DT8 300 mA (Betriebsgerät separat bestellen)<br>PS 230 V / 50 Hz constant current 450 mA / DT8 300 mA (order control gear separately) |
| Lichtregelung<br>Lighting control             | PhasenDIM, DALI / TouchDIM, DALI / DT8<br>Phase-cut, DALI / TouchDIM, DALI / DT8                                                                                               |

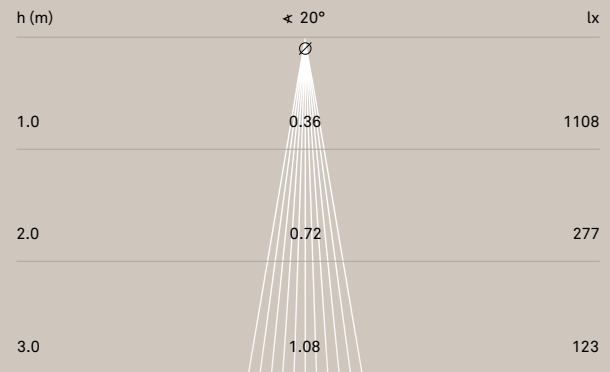


Zum Einklicken in SCOPY Aufnahme, 360° dreh- und 90°schwenkbar  
To click in the SCOPY capturing, 360° rotatable and 90° swivelable

Hochwertige Freiformlinse, stufenlos fokussierbar von 20°–70°  
High-quality free-form lense, fully adjustable focus from 20° to 70°

Pflichtzubehör:  
Tragschiene, Module, Einsatz für RAYM Anwendungen, ext. Betriebsgeräte, RAYM Montagering, -rahmen, Montagering für randlosen Einbau, 1er Einbaugehäuse  
Essential accessories: mounting rail, modules, insert for RAYM applications, ext. control gears, RAYM mounting -ring, -frame, mounting ring for flush installation, single installation housing




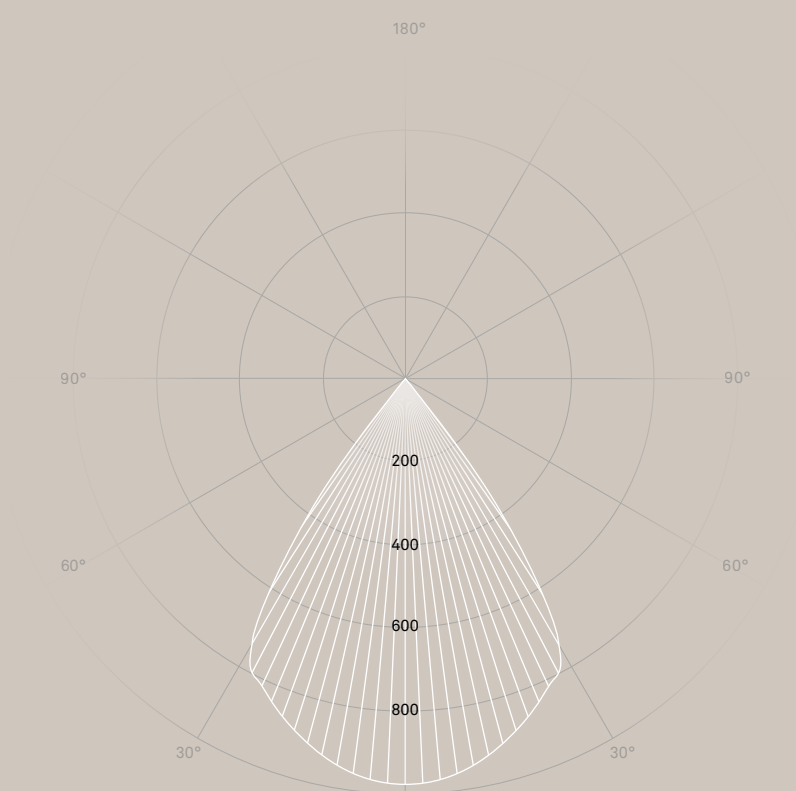

### SCOPY 70°



C90 / C270 ———  
C0 / C180 |||||

cd / 1000lm

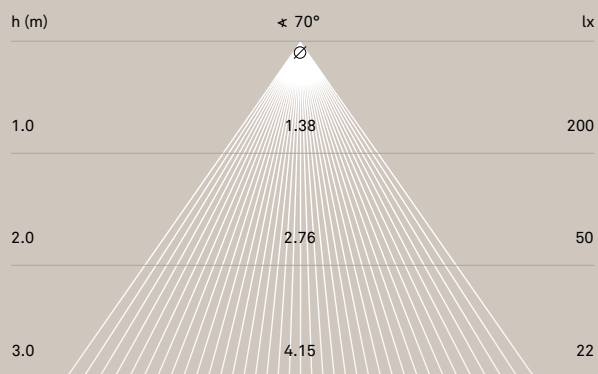

**Optionales Zubehör:**  
Verlängerungskabel, Blind-  
abdeckung, Eckverbinder,  
Pendel-Set, Baldachin, Stahl-  
seilabhängung, Anschluss-  
kabel, Montagebügel-Set,  
Casambi Modul

Optional accessories:  
extension cable, blind cover,  
corner connector, pendant-set,  
canopy, steel cable suspen-  
sion, connecting cable, mount-  
ing bracket set,  
casambi module

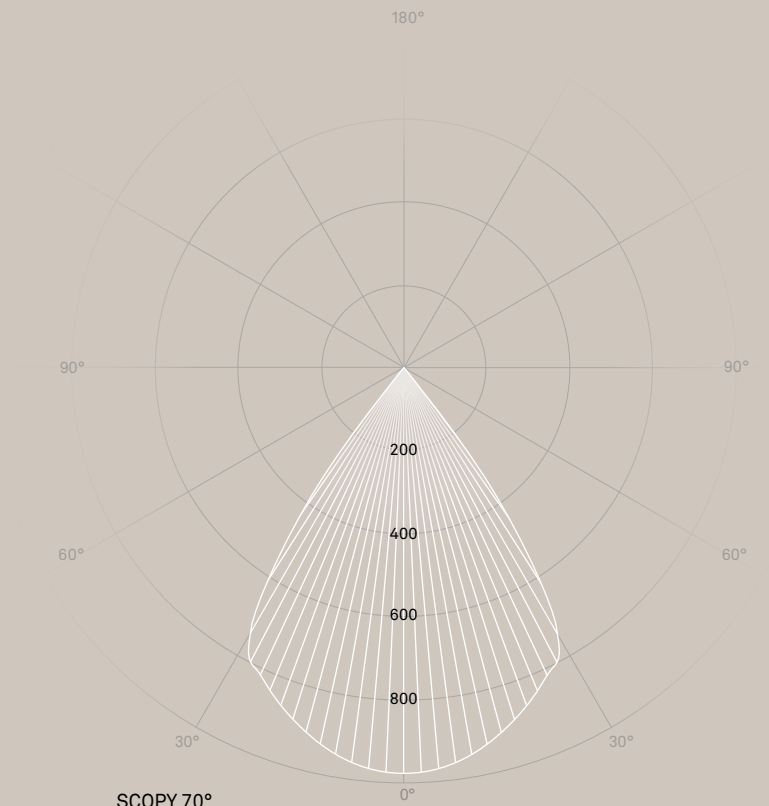

SCOPY 70°

C90 / C270

C0 / C180




cd / 1000 lm



## Pendelleuchten

### Pendant lamps

|                                               |                                                                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Leuchtengehäuse<br>Lamp housing               | Aluminium veredelt<br>Aluminum finished                                                                                                                                        |
| Farben<br>Colours                             | schwarz RAL 9005 / weiss RAL 9003 / grau RAL 9006 / rosé gold / sand gold<br>black RAL 9005 / white RAL 9003 / grey RAL 9006 / rose gold / sand gold                           |
| Farbtemperaturen<br>Colour temperatures       | 2700 / 3000 / 2200–5000 K                                                                                                                                                      |
| Leuchtenlichtstrom<br>Luminaire luminous flux | 158–205 lm                                                                                                                                                                     |
| Anschlussleistung<br>Connected load           | 4 W                                                                                                                                                                            |
| Nutzlebensdauer LED<br>Service life LED       | 50'000 h L90 B10 (Ta 25 °C)                                                                                                                                                    |
| Betriebsgerät<br>Control gear                 | EVG 230 V / 50 Hz Konstantstrom 450 mA / DT8 300 mA (Betriebsgerät separat bestellen)<br>PS 230 V / 50 Hz constant current 450 mA / DT8 300 mA (order control gear separately) |
| Lichtregelung<br>Lighting control             | PhasenDIM, DALI / TouchDIM, DALI / DT8<br>Phase-cut, DALI / TouchDIM, DALI / DT8                                                                                               |

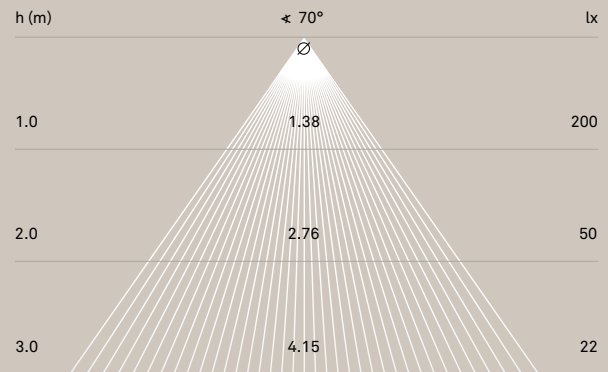

**Zum Eindrehen in SCOPY  
Aufnahme**

To screw in the SCOPY  
capturing

**Hochwertige Freiformlinse,  
70°**

High-quality free-form lense,  
70°

**Pflichtzubehör:**

Tragschiene, Module, Einsatz  
für RAYM Anwendungen,  
ext. Betriebsgeräte, RAYM  
Montagering, -rahmen,  
Montagering für randlosen  
Einbau, 1er Einbaugehäuse

Essential accessories:  
mounting rail, modules, insert  
for RAYM applications, ext.  
control gears, RAYM mounting  
-ring, -frame, mounting ring  
for flush installation, single  
installation housing

**Optionales Zubehör:**

Verlängerungskabel, Blind-  
abdeckung, Eckverbinder,  
Pendel-Set, Baldachin, Stahl-  
seilabhängung, Anschlusska-  
bel, Montagebügel-Set, Ca-  
sambi Modul

Optional accessories:  
extension cable, blind cover,  
corner connector, pendant-  
set, canopy, steel cable sus-  
pension, connecting cable,  
mounting bracket set, casambi  
module

## SCOPY lamp types

### Spots



#### Note:

Order control gear/modules separately;  
constant current 450 mA, DT8 300 mA

| Article       | °       | Watt | Lumen     | Kelvin      | Lenght  | EURO         |
|---------------|---------|------|-----------|-------------|---------|--------------|
| 4200.000.00.□ | 20 - 70 | 4    | 87 - 193  | 2200 - 5000 | 43 - 50 | <b>89.00</b> |
| 4200.000.27.□ | 20 - 70 | 4    | 122 - 198 | 2700        | 43 - 50 | <b>79.00</b> |
| 4200.000.30.□ | 20 - 70 | 4    | 126 - 205 | 3000        | 43 - 50 | <b>79.00</b> |

Colour code (□) 2 black RAL 9005 | 3 white RAL 9003 | 8 grey RAL 9006 | 16 rose gold | 17 sand gold

### Pendant lamps



#### Note:

Order control gear/modules separately;  
constant current 450 mA, DT8 300 mA

| Article       | °   | Watt | Lumen     | Kelvin      | Lenght | EURO          |
|---------------|-----|------|-----------|-------------|--------|---------------|
| 4201.430.00.□ | 70° | 4    | 150 - 193 | 2200 - 5000 | 430    | <b>197.00</b> |
| 4201.430.27.□ | 70° | 4    | 198       | 2700        | 430    | <b>181.00</b> |
| 4201.430.30.□ | 70° | 4    | 205       | 3000        | 430    | <b>181.00</b> |

Colour code (□) 2 black RAL 9005 | 3 white RAL 9003 | 8 grey RAL 9006 | 16 rose gold | 17 sand gold

## SCOPY essential accessories for integration in MILUM mounting rails

### SCOPY module of 1

For tool-less installation of 1 spot or pendant lamp on MILUM mounting rails (order separately); aluminium housing, polycarbonate V0; control gear 230 V/50 Hz



| Article        | Light control | Watt | Lenght | EURO          |
|----------------|---------------|------|--------|---------------|
| 4203.300.□ D   | phase-cut     | 4    | 300    | <b>133.00</b> |
| 4203.300.□ DIG | DALI/TouchDIM | 4    | 300    | <b>163.00</b> |
| 4203.300.□ DT8 | DALI/DT8      | 4    | 300    | <b>182.00</b> |

Colour code (□) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

### SCOPY module of 3

For tool-less installation of 3 spots or pendant lamps on MILUM mounting rails (order separately); aluminium housing, polycarbonate V0; control gear 230 V/50 Hz; spot and pendant lamp can be placed flexibly




| Article        | Light control | Watt | Lenght | EURO          |
|----------------|---------------|------|--------|---------------|
| 4203.600.□ D   | phase-cut     | 12   | 600    | <b>207.00</b> |
| 4203.600.□ DIG | DALI/TouchDIM | 12   | 600    | <b>234.00</b> |
| 4203.600.□ DT8 | DALI/DT8      | 12   | 600    | <b>294.00</b> |

Colour code (□) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

**SCOPY essential accessories  
for integration in MILUM mounting rails**

| SCOPY module of 5                                                                                                                                                                                              | Article        | Light control | Watt | Lenght | EURO          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------|------|--------|---------------|
| For tool-less installation of 3 spots or pendant lamps on MILUM mounting rails (order separately); aluminium housing, polycarbonate V0; control gear 230 V/50 Hz; spot and pendant lamp can be placed flexibly | 4203.900.▬ D   | phase-cut     | 20   | 900    | <b>250.00</b> |
|                                                                                                                                                                                                                | 4203.900.▬ DIG | DALI/TouchDIM | 20   | 900    | <b>277.00</b> |

Colour code (▬) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003



**Mounting rails "surface mounting"  
for system applications**

|                                                                                                                                                                                                  | Article       | Lenght | EURO          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|---------------|
| For the installation of SCOPY LED modules; mounting rail extruded aluminium; feedthrough wiring 5 x 1,5 mm <sup>2</sup> (excluding lengths 450 mm and 600 mm); 1 connecting plate; 2 side covers | 4174.045.00.▬ | 450    | <b>98.00</b>  |
|                                                                                                                                                                                                  | 4174.060.00.▬ | 600    | <b>111.00</b> |
|                                                                                                                                                                                                  | 4174.090.00.▬ | 900    | <b>126.00</b> |
|                                                                                                                                                                                                  | 4174.120.00.▬ | 1200   | <b>156.00</b> |
|                                                                                                                                                                                                  | 4174.150.00.▬ | 1500   | <b>177.00</b> |
|                                                                                                                                                                                                  | 4174.180.00.▬ | 1800   | <b>202.00</b> |



\* Länge ohne Endkappen/Length without endcaps

Colour code (▬) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

**SCOPY optional accessories  
for integration in MILUM**

| Blind cover                                     | Article       | Lenght | EURO          |
|-------------------------------------------------|---------------|--------|---------------|
| For covering mounting rails; extruded aluminium | 4164.015.02.▬ | 150    | <b>51.00</b>  |
|                                                 | 4164.030.02.▬ | 300    | <b>54.00</b>  |
|                                                 | 4164.045.02.▬ | 450    | <b>61.00</b>  |
|                                                 | 4164.060.02.▬ | 600    | <b>63.00</b>  |
|                                                 | 4164.090.02.▬ | 900    | <b>72.00</b>  |
|                                                 | 4164.120.02.▬ | 1200   | <b>82.00</b>  |
|                                                 | 4164.150.02.▬ | 1500   | <b>93.00</b>  |
|                                                 | 4164.180.02.▬ | 1800   | <b>102.00</b> |

Colour code (▬) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

**Corner connector "Surface mounting" 90°  
for system applications**

|                                                                                            | Article       | Dimensions     | EURO          |
|--------------------------------------------------------------------------------------------|---------------|----------------|---------------|
| Feed-through wiring 5 x 1.5 mm <sup>2</sup> ; 2 connecting plates; cover profile aluminium | 4174.500.00.▬ | 150 x 150 x 51 | <b>180.00</b> |



Colour code (▬) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

## SCOPY essential accessories

### SCOPY mounting rails for 4 lamps

For tool-less installation of 2 pendant lamps and 2 spots (order separately) incl. MILUM mounting rails; aluminium housing, polycarbonate V0; control gear 230 V/50 Hz; circuits for separate control of spots (A) and pendant lamps (B)



\* Länge ohne Endkappen/Length without endcaps

| Article         | Light control      | Watt | Lenght | EURO    |
|-----------------|--------------------|------|--------|---------|
| 4203.120.0. CAS | DALI + Casambi     | 16   | 1200   | 1194.00 |
| 4203.120.1. CAS | DALI/DT8 + Casambi | 16   | 1200   | 1265.00 |
| 4203.120.0. D   | phase-cut          | 16   | 1200   | 761.00  |
| 4203.120.0. DIG | DALI/TouchDIM      | 16   | 1200   | 795.00  |
| 4203.120.0. DT8 | DALI/DT8           | 16   | 1200   | 854.00  |

Colour code ( ) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

### SCOPY mounting rails for 7 lamps

For tool-less installation of 3 pendant lamps and 4 spots (order separately) incl. MILUM mounting rails; aluminium housing, polycarbonate V0; control gear 230 V/50 Hz; circuits for separate control of spots (A) and pendant lamps (B)



\* Länge ohne Endkappen/Length without endcaps

| Article         | Light control      | Watt | Lenght | EURO    |
|-----------------|--------------------|------|--------|---------|
| 4203.180.0. CAS | DALI + Casambi     | 28   | 1800   | 1370.00 |
| 4203.180.1. CAS | DALI/DT8 + Casambi | 28   | 1800   | 1435.00 |
| 4203.180.0. D   | phase-cut          | 28   | 1800   | 894.00  |
| 4203.180.0. DIG | DALI/TouchDIM      | 28   | 1800   | 922.00  |
| 4203.180.0. DT8 | DALI/DT8           | 28   | 1800   | 982.00  |

Colour code ( ) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

### Connecting plates

For the connection of multiple SCOPY mounting rails

| Article       | EURO  |
|---------------|-------|
| 4174.000.00.0 | 25.00 |

## SCOPY essential accessories for pendant applications with mounting rails

### Pendant set for nondimmable or phasecut dimmable lamps

2 mounting brackets; 2 nickel-plated steel cable suspension; round cable transparent 3 x 0,75 mm<sup>2</sup>, freely height adjustable; 2 cable holders; required for the connection of a non-dimmable or phase-cut dimmable pendant lamp

| Article    | Lenght | EURO   |
|------------|--------|--------|
| 253.200. ) | 2500   | 110.00 |

Colour code ( ) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003


### Pendant set for dimmable lamps

2 mounting brackets; 2 nickel-plated steel cable suspension; round cable transparent 5 x 0,75 mm<sup>2</sup>, freely height-adjustable; 2 cable holders; required for the connection of a dimmable pendant lamp

| Article    | Lenght | EURO   |
|------------|--------|--------|
| 253.205. ) | 2500   | 110.00 |

Colour code ( ) 0 natural anodised | 2 black RAL 9005 | 3 white RAL 9003

**SCOPY optional accessories  
for pendant applications with mounting rails**

| Canopy                                                                            | Article      | Ø   | EURO  |
|-----------------------------------------------------------------------------------|--------------|-----|-------|
| Suitable for vertical and horizontal cable feeds                                  | 212.500.____ | 100 | 54.00 |
| Colour code (____) 0 grey RAL 9006   2 black RAL 9005   3 white RAL 9003          |              |     |       |
|  |              |     |       |


| Steel cable suspension<br>for system applications                                                                                              | Article   | Colour           | Lenght | EURO  |
|------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|--------|-------|
| 1 mounting bracket; 1 nickel-plated steel cable suspension, freely height-adjustable;<br>required for the suspension of multiple pendant lamps | 253.550.0 | natural anodised | 2500   | 39.00 |
|                                                                                                                                                | 253.550.2 | black RAL 9005   | 2500   | 52.00 |
|                                                                                                                                                | 253.550.3 | white RAL 9003   | 2500   | 52.00 |

| Connecting cable 1,5 mm2<br>for system applications  | Article   | Colour      | Light control | Dimensions | EURO  |
|------------------------------------------------------|-----------|-------------|---------------|------------|-------|
| Required for the connection of several pendant lamps | 213.553.9 | transparent | on/off        | Ø6 x 2500  | 39.00 |
|                                                      | 213.555.9 | transparent | DALI          | Ø8 x 2500  | 55.00 |

| Mounting bracket set                                                                | Article      | EURO  |
|-------------------------------------------------------------------------------------|--------------|-------|
| 2 mounting brackets; for free cable routing;<br>ceiling / wall spacing 8 mm         | 212.100.____ | 54.00 |
| Colour code (____) 0 natural anodised   2 black RAL 9005   3 white RAL 9003         |              |       |
|  |              |       |


**SCOPY essential accessories  
for installation with RAYM mounting rings/frame and rimless installation**

| SCOPY insert of 2<br>for RAYM mounting ring/frame                                           | Article          | Material        | Light control                  | EURO  |
|---------------------------------------------------------------------------------------------|------------------|-----------------|--------------------------------|-------|
| For tool-less installation of 2 SCOPY lamps, in RAYM mounting ring/frame (order separately) | 4197.060.02.____ | Polycarbonat V0 | for Single Colour applications | 65.00 |
|                                                                                             | 4197.060.04.____ | Polycarbonat V0 | for Tunable White applications | 73.00 |
| Colour code (____) 2 black RAL 9005   3 white RAL 9003                                      |                  |                 |                                |       |
|          |                  |                 |                                |       |


| Mounting ring 90                                                                                                              | Article          | Material         | Ø   | EURO  |
|-------------------------------------------------------------------------------------------------------------------------------|------------------|------------------|-----|-------|
| For tool-less mounting of 2 SCOPY lamps and one SCOPY insert (order separately) in cavity ceilings, ceiling thickness 1–25 mm | 4192.090.00.____ | Polycarbonate V0 | Ø75 | 14.00 |
| Colour code (____) 2 black RAL 9005   3 white RAL 9003                                                                        |                  |                  |     |       |
|                                            |                  |                  |     |       |

**SCOPY essential accessories**  
**for installation with RAYM mounting rings/frame and rimless installation**


| Mounting frames 90 × 90                                                                                                       | Article       | Material         | Ø   | EURO  |
|-------------------------------------------------------------------------------------------------------------------------------|---------------|------------------|-----|-------|
| For tool-less mounting of 2 SCOPY lamps and one SCOPY insert (order separately) in cavity ceilings, ceiling thickness 1–25 mm | 4193.090.00.┐ | Polycarbonate V0 | Ø75 | 15.00 |
| Colour code (┐) 2 black RAL 9005   3 white RAL 9003                                                                           |               |                  |     |       |




| Mounting frames 2-gang, 90 × 180                                                                                             | Article       | Material         | EURO  |
|------------------------------------------------------------------------------------------------------------------------------|---------------|------------------|-------|
| For tool-less mounting of 4 SCOPY lamps and 2 SCOPY inserts (order separately) in cavity ceilings, ceiling thickness 1–25 mm | 4193.180.00.┐ | Polycarbonate V0 | 30.00 |
| Colour code (┐) 2 black RAL 9005   3 white RAL 9005                                                                          |               |                  |       |



| Mounting frames 3-gang, 90 × 270                                                                                             | Article       | Material         | EURO  |
|------------------------------------------------------------------------------------------------------------------------------|---------------|------------------|-------|
| For tool-less mounting of 6 SCOPY lamps and 3 SCOPY inserts (order separately) in cavity ceilings, ceiling thickness 1–25 mm | 4193.270.00.┐ | Polycarbonate V0 | 43.00 |
| Colour code (┐) 2 black RAL 9005   3 white RAL 9003                                                                          |               |                  |       |

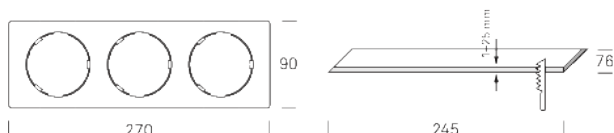

| Mounting ring for flush installation in plasterboard ceilings                                                                       | Article       | Material        | Colour         | Ø   | EURO  |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|----------------|-----|-------|
| For rimless installation of 2 SCOPY lamps with 1 SCOPY insert (order separately) in plasterboard, ceiling thicknesses from 10–31 mm | 4194.079.03.3 | Polycarbonat V0 | white RAL 9003 | Ø80 | 13.00 |



**SCOPY essential accessories**  
**for installation with RAYM mounting rings/frame and rimless installation**

| External control gears for 1 SCOPY insert                                                                                | Article            | Light control | Watt | Dimensions    |  | EURO         |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|---------------|------|---------------|-------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz incl. connector cable with plug connection, length 350 mm; constant current 450 mA, 300 mA DT8 | 915.020.450.01 D   | phase-cut     | 8-17 | 111 x 52 x 22 | Ø55                                                                                 | <b>51.00</b> |
|                                                                                                                          | 915.018.450.01 DIG | DALI/TouchDIM | 8-17 | 135 x 44 x 27 | Ø54                                                                                 | <b>81.00</b> |
|                                                                                                                          | 915.020.300.01 DT8 | DALI/DT8      | 20   | 117 x 46 x 29 | Ø52                                                                                 | <b>98.00</b> |

| External control gears for 2 SCOPY inserts                                                                    | Article            | Light control | Watt  | Dimensions    |  | EURO         |
|---------------------------------------------------------------------------------------------------------------|--------------------|---------------|-------|---------------|-------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz incl. connecting cable with plug connection, length 350 mm; constant current 450 mA | 915.020.450.02 D   | phase-cut     | 2 x 8 | 111 x 52 x 22 | Ø57                                                                                 | <b>56.00</b> |
|                                                                                                               | 915.018.450.02 DIG | DALI/TouchDIM | 2 x 8 | 135 x 44 x 27 | Ø52                                                                                 | <b>85.00</b> |


| External control gears for 3 SCOPY inserts                                                                    | Article            | Light control | Watt  | Dimensions    |  | EURO         |
|---------------------------------------------------------------------------------------------------------------|--------------------|---------------|-------|---------------|-------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz incl. connecting cable with plug connection, length 350 mm; constant current 450 mA | 915.030.450.03 D   | phase-cut     | 3 x 8 | 180 x 60 x 35 | Ø70                                                                                 | <b>60.00</b> |
|                                                                                                               | 915.042.450.03 DIG | DALI/TouchDIM | 3 x 8 | 103 x 67 x 22 | Ø71                                                                                 | <b>89.00</b> |

| Extension cable                                                                                                                                                                                                          | Article    | Function      | EURO         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------|--------------|
| Extension cable DC (SELV) with plug connection; suitable for extending the connection cables between the operating device and LED module; max. 1 extension cable between operating device and LED module; length 2000 mm | 4196.200.2 | Single Colour | <b>12.00</b> |
|                                                                                                                                                                                                                          | 4196.200.3 | Tunable White | <b>16.00</b> |

**SCOPY essential accessories**  
for rimless single-installations with external control gear

| SCOPY single installation housing                                                   | Article       | Function              | Dimensions |  | EURO         |
|-------------------------------------------------------------------------------------|---------------|-----------------------|------------|-------------------------------------------------------------------------------------|--------------|
| For the installation of 1 SCOPY lamp in wood, fixing by grub screws, tools included | 4205.038.01.□ | 1 lamp, single color  | Ø38 x 43   | Ø38                                                                                 | <b>35.00</b> |
|                                                                                     | 4205.038.02.□ | 1 lamp, tunable white | Ø38 x 43   | Ø38                                                                                 | <b>39.00</b> |

Colour code (□) 2 black RAL 9005 | 3 white RAL 9003



| External control gears for 1 – 2 lamps                                          | Article       | Light control | Watt | Dimensions    |  | EURO         |
|---------------------------------------------------------------------------------|---------------|---------------|------|---------------|-------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz; constant current 450 mA; incl. distribution terminal | 915.008.450 D | phase-cut     | 8    | 120 x 30 x 20 | Ø38                                                                                 | <b>60.00</b> |

| External control gears for 3 – 5 lamps                                          | Article          | Light control | Watt | Dimensions    |  | EURO         |
|---------------------------------------------------------------------------------|------------------|---------------|------|---------------|-------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz; constant current 450 mA; incl. distribution terminal | 915.020.450.03 D | phase-cut     | 20   | 120 x 30 x 20 | Ø38                                                                                 | <b>69.00</b> |

| External control gears for 1 – 4 lamps                                          | Article            | Light control | Watt | Dimensions    |  | EURO         |
|---------------------------------------------------------------------------------|--------------------|---------------|------|---------------|---------------------------------------------------------------------------------------|--------------|
| Control gears 230 V/50 Hz; constant current 450 mA; incl. distribution terminal | 915.018.450.04 DIG | DALI/TouchDIM | 18   | 120 x 30 x 20 | Ø38                                                                                   | <b>81.00</b> |

| External control gears for 1 lamp                 | Article         | Light control | Watt | Dimensions    |  | EURO         |
|---------------------------------------------------|-----------------|---------------|------|---------------|---------------------------------------------------------------------------------------|--------------|
| Control gear 230 V/50 Hz; constant current 300 mA | 915.004.300 DT8 | DALI DT8      | 4    | 120 x 30 x 20 | Ø38                                                                                   | <b>90.00</b> |

**SCOPY optional accessories**

| Casambi Bluetooth module                                                                                                                                                                                                                                            | Article     | Dimensions   | EURO          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|---------------|
| Suitable for connection to DALI lamps; Controllable via bluetooth using the Casambi-App; Allows simultaneous control of up to 20 DALI lamps per modul; Please consider the compatibility of dimmers at <a href="http://ribag.com/downloads">ribag.com/downloads</a> | 915.000 DIG | 82 x 26 x 20 | <b>188.00</b> |

# IMPRESSUM IMPRINT

**General information:**

All prices are recommended retail prices excluding VAT. The technical data refer to rated values at an ambient temperature of 25 °C and are guide values with a tolerance of  $\pm 10\%$ . Subject to change without notice. No liability is accepted for printing errors.

Prices are subject to change without notice.

Please consider the compatibility of dimmers at [ribag.com/downloads](http://ribag.com/downloads)



[ribag.com](http://ribag.com)



[@ribaglight](https://www.instagram.com/ribaglight)



[ribaglight](https://www.facebook.com/ribaglight)

**Headquarters**

RIBAG Licht AG  
Kanalstrasse 18  
5745 Safenwil  
Switzerland  
Tel +41 62 737 90 10 (Sales)  
Tel +41 62 737 50 70 (Service)  
[info@ribag.com](mailto:info@ribag.com)  
[www.ribag.com](http://www.ribag.com)

© RIBAG Licht AG

966.046.23 EN/EUR 03/24

